



CHIYU Smart Security - Mobile Access Control

Mobile Access Control Advantages:


- ✓ Cost-effective way to manage credentials
- ✓ Contactless verification
- ✓ No more physical card & keyfob everlastingly
- ✓ Scalable - simply assign more credentials for visitors
- ✓ More distance- BLE range can be meters instead of inches



Android




ios

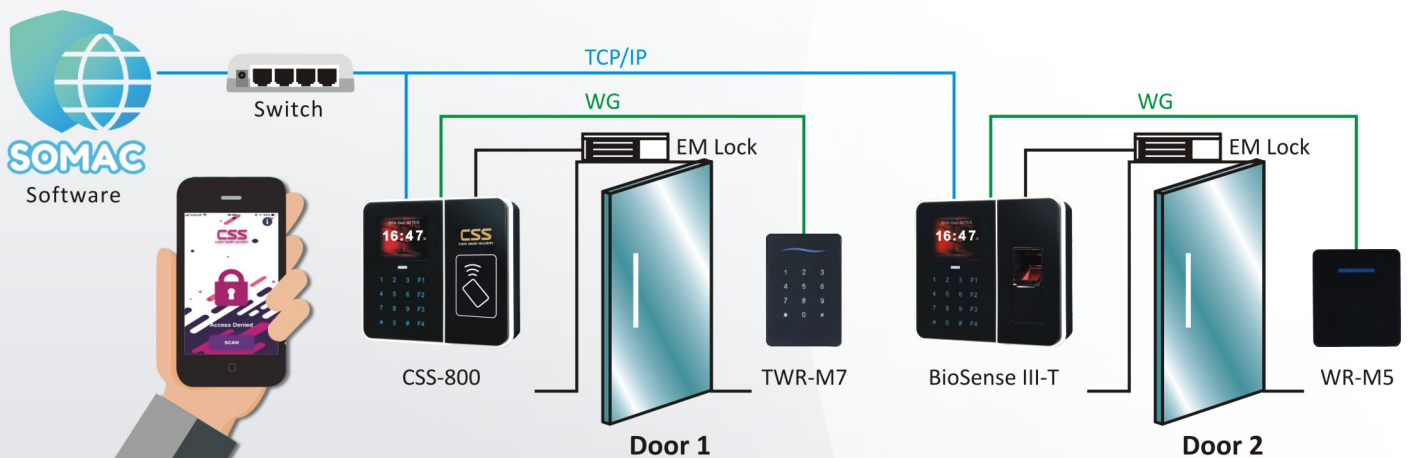

Available controller:
Biosense III-T / CSS-800 / CSS-R11

Available reader:
WR-M5 / WR-M7 / WR-M7S / TWR-M5 / TWR-M7

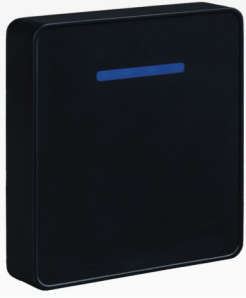

WR-M5



TWR-M5



WR-M7



TWR-M7



WR-M7S

Reader/ Keypad specifications					
Reader	WR-M5	TWR-M5	WR-M7	TWR-M7	WR-M7S
Technology	Mifare / Desfire (EV1 & EV2) / NFC/ BLE				
Frequency	13.56Mhz				
Mounting	Wall Mount				
Dimensions	3.38" x 3.74 x 0.83" (86 x 95 x 21 mm)		4.75" x 3.125" x 0.75" (119 x 80 x 20 mm)		4.75" x 3.125" x 0.75" (100 x 50 x 20 mm)
Weight	5.29 oz (150 g)	5.46 oz (155 g)	5.50 oz (156 g)	5.64 oz (160 g)	4.23 oz (120 g)
Power consumption	90mA @ 12VDC				
Communication	Wiegand / OSDP ver. 1 & 2				
Transmit distance	WG: 100M/ OSDP: 1000M				
Built-in Watch Dog	✓				
Weatherproof	✓				
Buzzer	✓				
Power requirement	DC 9 ~ 24V				
Operation temperature	-40 °F ~ 158 °F (-40 °C ~ 70 °C)				
Color	Black				
Visual Annunciation	Tri-color LED				
Warranty	2 years				
Certification	CE FC				

Order information

